


Power-Supply 4-16VDC, Constant Current 700mA

Article-nr. 309001001

Technical Illustration

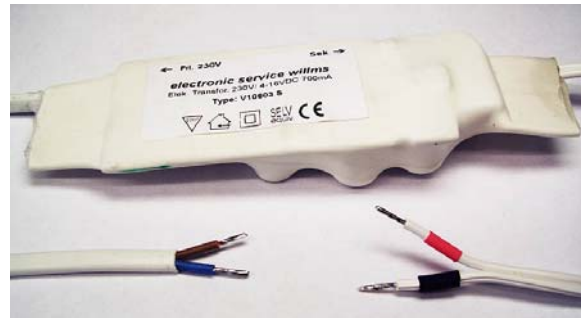

Description

Power-Supply with constant current output (700mA) for outdoor advertising-applications. Specially designed to provide either 1-6 high-power LEDs, type 1W or 1-4 high-power LEDs, Typ 2.5W

Specification

Power Supply:	220 V AC +/- 15%	Ambient Temperature:	-10° to +60 °C
Input Frequency:	50/60 Hz	Storage Temperature:	-30° to + 100 °C
Output Voltage:	4-16 VDC	Electric Strength:	2,75 kV _{eff}
Output Current (constant):	700mA +/-5%	Radio Interference:	
Output Rating:	0-9 W	Suppression:	EN 55015
Efficiency Factor:	82%	Harmonic Content:	EN 61000-3-2
Dim Function:	no	Immunity:	EN 61547
Short-Circuit-Proof:	electronic regulated, reversible	Certification:	CE/ENEC
Overload-protection:	electronic limitation	Dimension:	100 x 40 x 25 mm
Temperature protected:	electronic switch off, reversible	Protection Class:	IPX5
		Connectivity:	WAGO clips